

## Fiber Optic Fault Locator


### FIBERPOINT® 250D

Part Number: 1401000013



Ferrule 2.5 mm

- Applications:**
- The compact design of the visual fault locator is very suitable for **daily use** in all fiber optic applications e.g. **in the field, in industrial environment as well as in laboratories.**
  - Check **singlemode/multimode** optical fibers and other fiber optic components on faults.
  - **Patching** of fibers

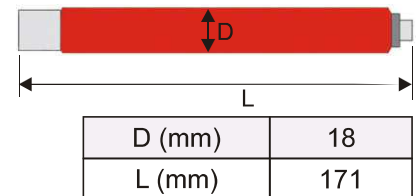

Parameter	Min.	Typ.	Max.
Wavelength		635 nm	
Operation temperature	- 10 °C		45 °C
Storage temperature	- 40 °C		70 °C
Fiber coupled power	(Singlemode fiber 9/125 µm)	500 µW	700 µW
	(Multimode fiber 50/125 µm)	500 µW	800 µW
Optical output power			1 mW
Operation current		40 mA	
Retention force for ferrule		1-2 N	
Weight incl. batteries		60 g	
Operation time - one battery pack <sup>1</sup> (Pulsed mode)		40 hours	
Battery type		AAA	
Operation mode	<b>Continuous Wave</b>		
Laser protection class	2		
Suitable ferrule 2.5 mm	DIN, E2000, FC, SC, ST		

**Included in delivery:**

- Dust cap
- One battery pack
- Instruction manual
- "Quadrosafe" economy plastic shipping box

**Messkom Vertriebs GmbH**  
 Awarrenring 38  
 D-85419 Mauern

Tel: 0049 (0)8764 / 948 430  
 Fax: 0049 (0)8764 / 948 433

Email: info@messkom.de  
 Web: www.messkom.de



**Accessories (not included):**

- Adapters please see page 7/8 this brochure

**Feature:**

- Private labelling is available instead of stamping "FIBERPOINT® 250"
- One - time charge applies

Notes: Do not use rechargeable batteries.

Compliant with RoHS-requirements (2002/95/EG vom 27.01.2003)

The above product specifications are subject to change without notice.

<sup>1)</sup> Battery: VARTA Industrial Alkaline No. 4003; 1.5 V; AAA; LR03 Micro; AM4; MN2400